




Universal Audio

Division of Studio Electronics Corporation
11922 Valerio Street, North Hollywood, California
phone (213) 764-1500

AMPLIFIER MODEL 1016

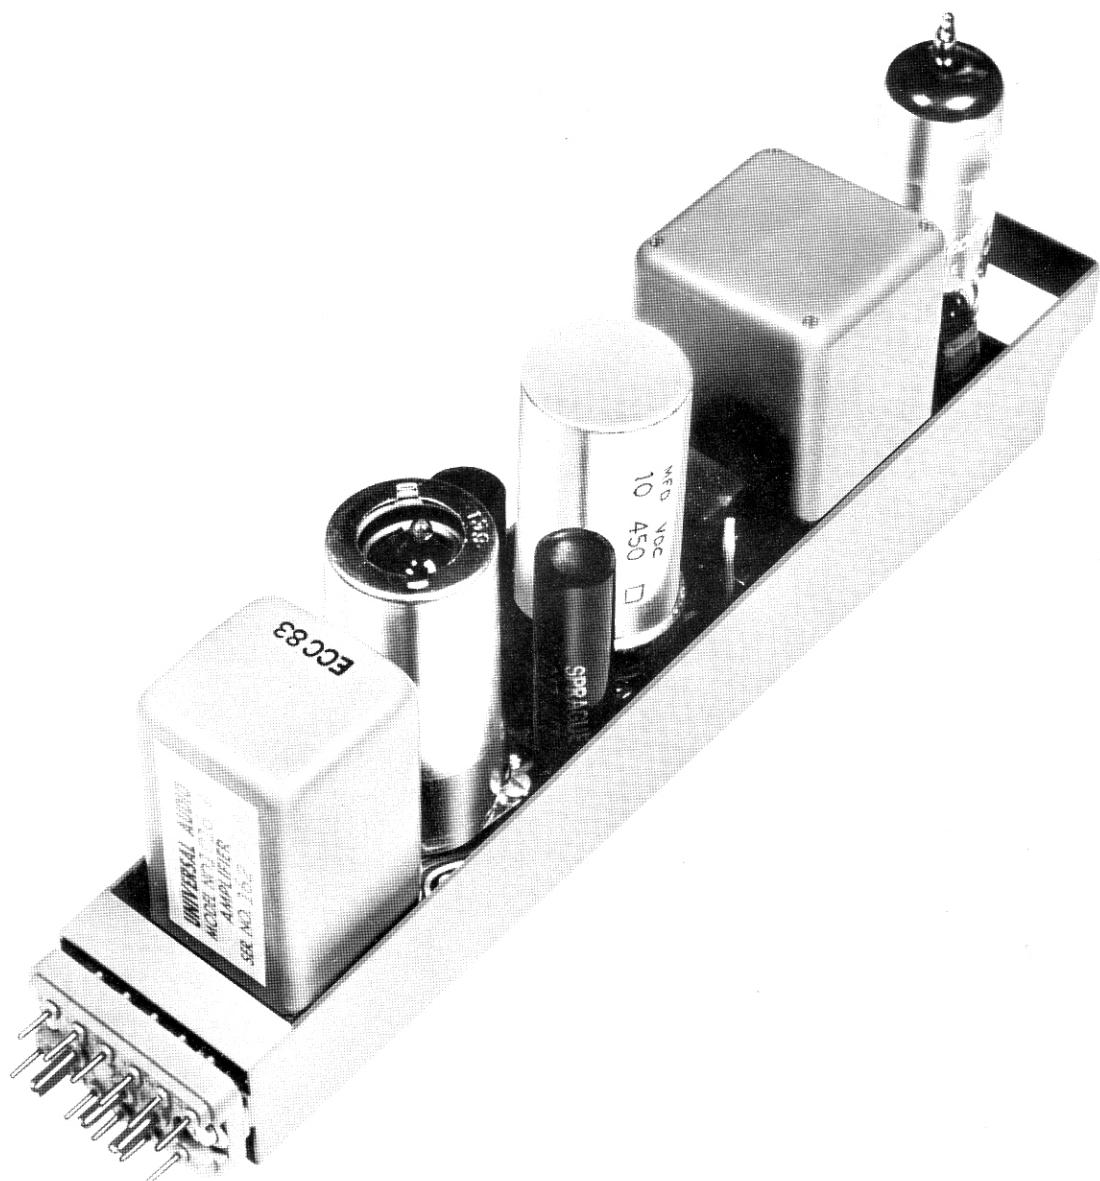

The 1016 is a miniature (1 1/2" wide including tray), plug-in amplifier. One unique feature of this unit is that, unlike the normal amplifier, this item is suitable for all applications; as a microphone preamplifier, a booster amplifier, or a line level program amplifier in any professional audio system. This allows for standardization and improved utility.

The 1016 is a push-pull, two stage amplifier that incorporates the highest quality, military type printed circuitry and precision 1 per cent resistors to assure reliability and optimum performance.



The 1016 can be operated on either a 6 or 12 volt system by a simple adjustment with no change in amplification.

The 1016 may be used in any service application required in the control console, i.e. microphone preamps, booster amplifiers and program amplifier. These variations can be made by a simple tube change. When a 12AY7 is used in the output stage the unit delivers +20 dbm and is ideally suited for use as a preamp or booster amp, requiring only 13 MA. B+ at 300 volts. Using a 12BH7 in the output, the amplifier delivers +30 dbm for use as a line, cue or program amplifier.

The gain can be varied from 35 db to 45 db by simply changing two resistors.

Frequency response extends a full octave beyond that of most conventional amplifiers. This amplifier is flat \pm 1 db from 20 to 40,000 Hz. The tray of the 1016 fits inside the amplifier chassis. The overall width of only 1 1/2" gives more usable space on the chassis.

The use of glass epoxy printed circuitry boards, such as used in all military electronic equipment, insures long life and dependability.

PERFORMANCE SPECIFICATIONS

GAIN: Unloaded Input:

(Selectable)	40 db
	45 db
	50 db
600 ohm input:	35 db
(Selectable)	40 db
	45 db

FREQUENCY RESPONCE: \pm 0.5 db 20 to 20,000 Hz
 \pm 1 db at 40,000 Hz

POWER OUTPUT: Using 12BH7: + 30 dbm at less than 1% THD
30 to 20,000 Hz

Using 12AY7: + 20 dbm at less than 1% THD
30 to 20,000 Hz

SOURCE IMPEDANCE: 50, 150 or 600 ohms

LOAD IMPEDANCE: 150 or 600 ohms

INPUT IMPEDANCE: Nominally five times rated source impedance.
(Secondary of input transformer virtually unloaded).

OUTPUT IMPEDANCE: Designed to work into loads of 150 or 600 ohms. Internal output impedance is approximately 10 % of rated load impedance.

PHASE SHIFT: Less than 50° 20 to 20,000 Hz
180° point is 70 kHz

OUTPUT NOISE: Equivalent to an Input signal of -120 dbm
+ 20 dbm output 13 M.A. at 300 VDC


POWER REQUIREMENTS: For + 30 dbm output 34 M.A. at 300 VDC

FILAMENT: 6.3V at .9 amps with 12BH7; .6 amps with 12AY7
12.6V at .45 amps DC and .3 amps with 12AY7

TUBE COMPLEMENT: One 12AX7 (ECC83)
One 12AY7 or 12BH7

SIZE: 1 1/2" Wide (Including tray)
3 1/4" High
9" Long

TERMINAL STRAPPING TI

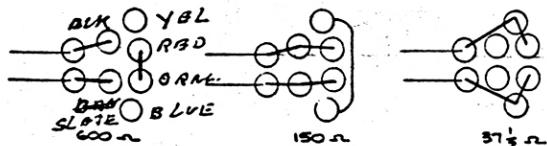


TERMINAL STRAPPING TZ

600 Ω STRAP RED & BLU/WH (SHOWN)
150 Ω STRAP RED & BLU
RED/WH & BLU/WH



CONNECTOR

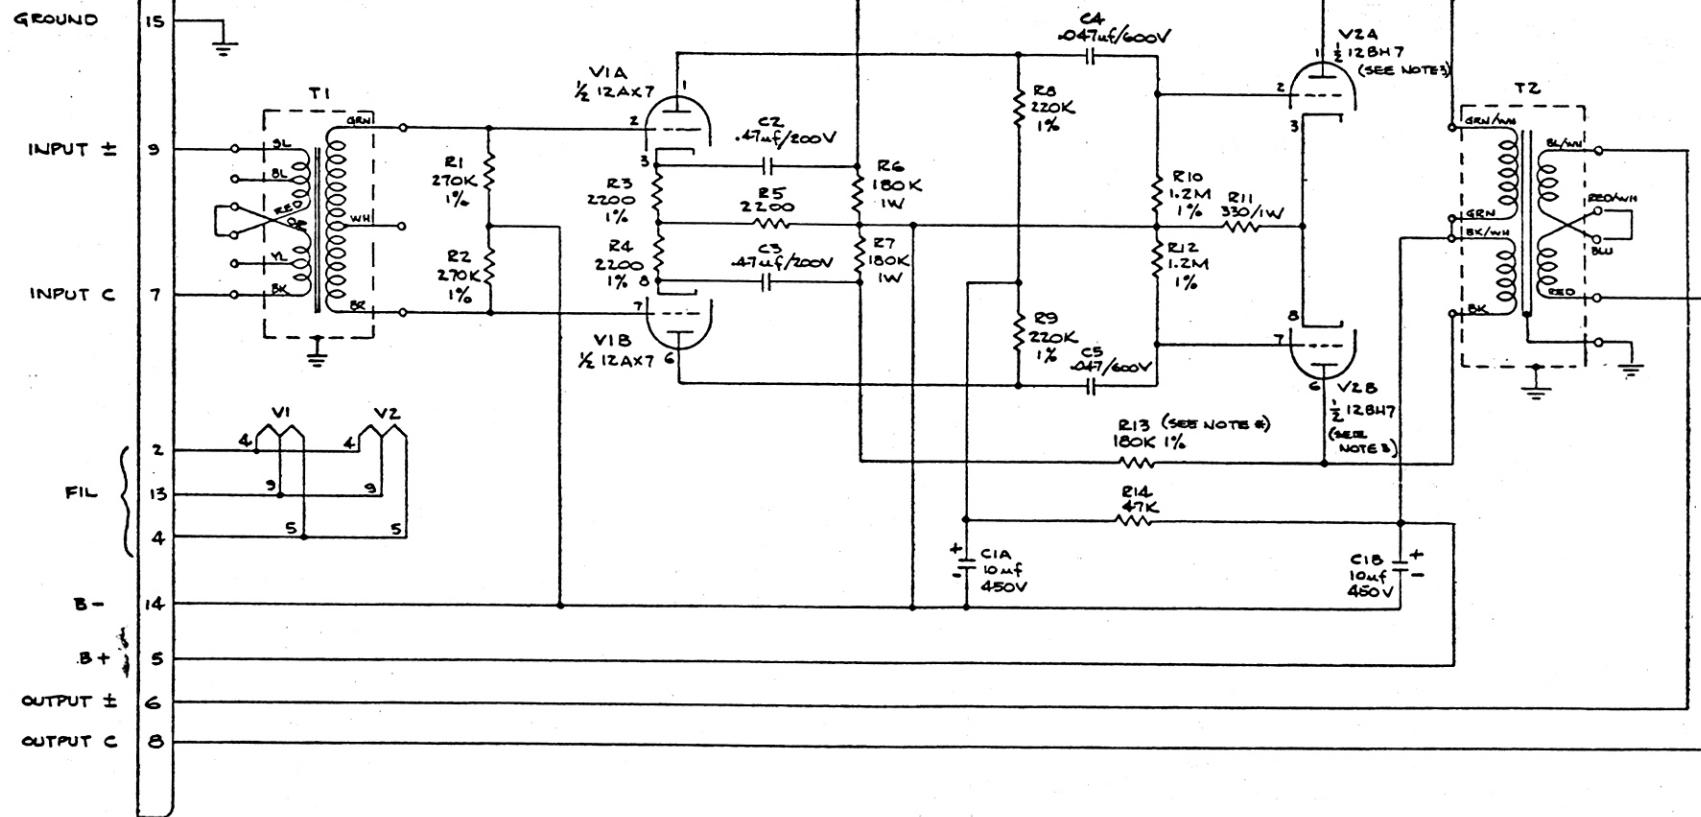

NOTE:

1. ALL RESISTORS $\frac{1}{2}$ W, 5% UNLESS OTHERWISE SPECIFIED
- * 2. R13 & R15 82K = 35 DB GAIN LOADED
180K = 40 DB GAIN LOADED
330K = 45 DB GAIN LOADED
NORMALLY SUPPLIED WITH 40 DB GAIN
3. USING 12BH7 : + 30 DBM
12AY7 : + 22 DBM


UNIVERSAL AUDIO, INC.
OF HOLLYWOOD
6052 SUNSET BLVD.,
HOLLYWOOD 28, CALIF.

PROGRAM OR
PRELIMINARY AMPLIFIER
MODEL 1016-B

DRAWN	CESTER 1/31/63
CHCKD	
APPV'D	

C-10014

TERMINAL STRAPPING T1

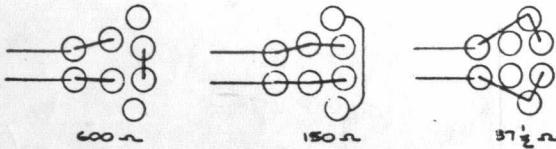


TERMINAL STRAPPING TZ

600 Ω STRAP RED & BLU/WH (SHOWN)
150 Ω STRAP RED & BLU
RED/WH & BLU/WH



CONNECTOR

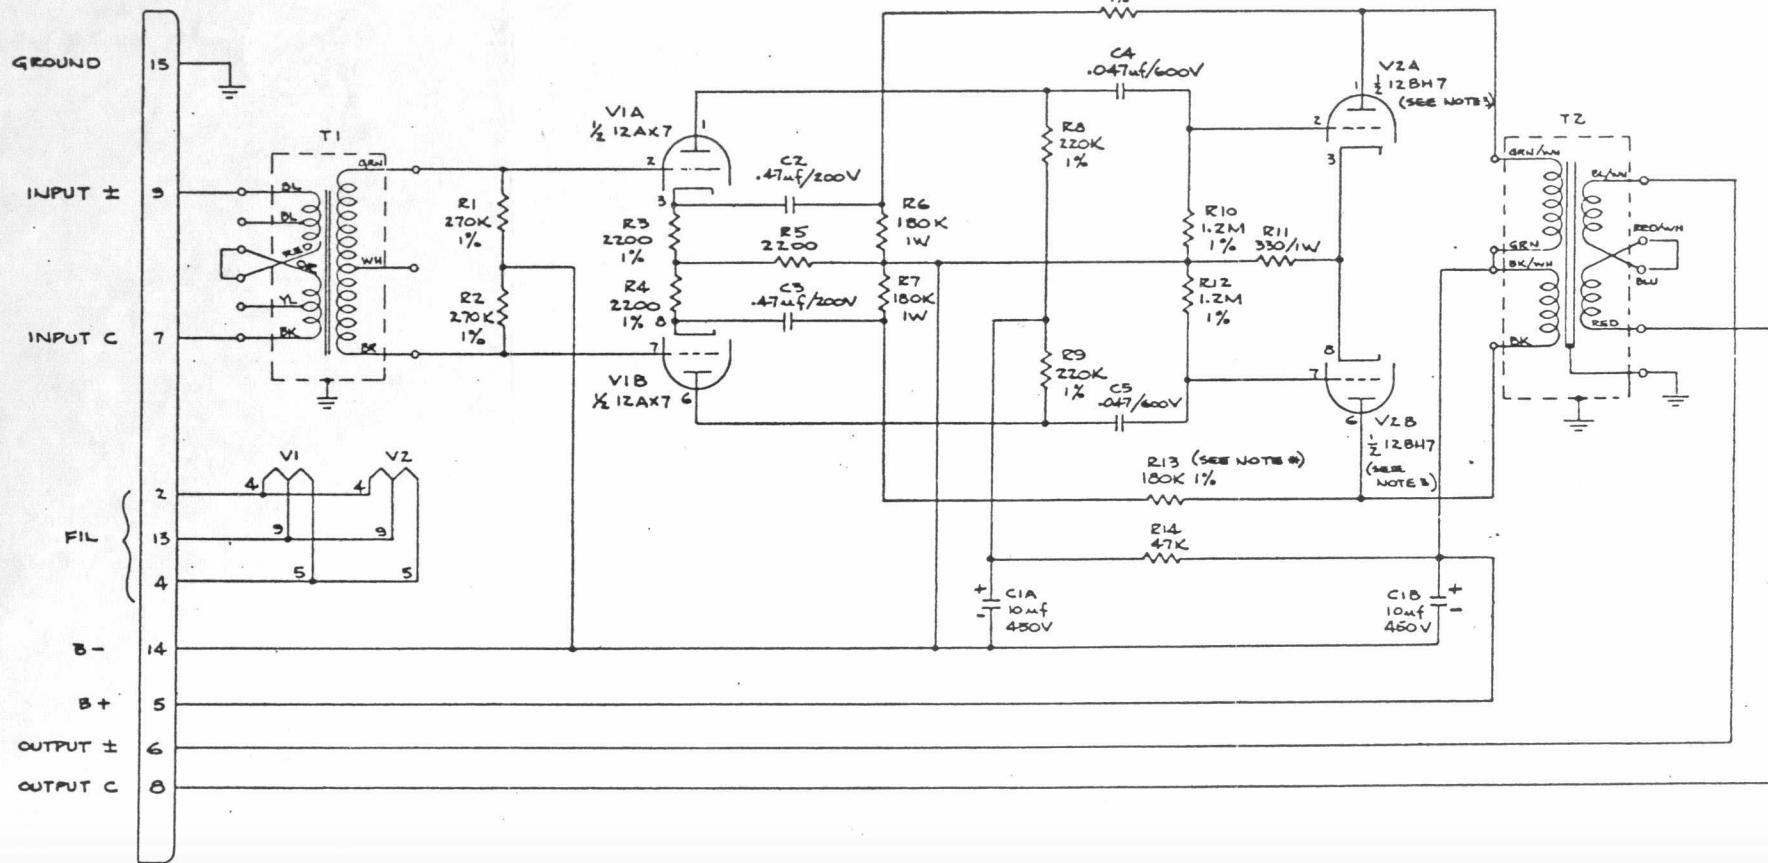

NOTE:

1. ALL RESISTORS $\frac{1}{2}$ W, 5% UNLESS OTHERWISE SPECIFIED
- * 2. R13 & R15 82K = 35 DB GAIN LOADED
180K = 40 DB GAIN LOADED
350K = 45 DB GAIN LOADED
NORMALLY SUPPLIED WITH 40 DB GAIN
3. USING 12 BH7 : + 30 DBM
12AY7 : + 22 DBM

UNIVERSAL AUDIO, INC.
OF HOLLYWOOD
6052 SUNSET BLVD.
HOLLYWOOD 28, CALIF.

PROGRAM OR
PRELIMINARY AMPLIFIER
MODEL 1016-B
DRAWN BY GTEC 1/16/68
CHGD
APPROVED
C-10014